

# Image Cover Sheet

**CLASSIFICATION****SYSTEM NUMBER**

498676

UNCLASSIFIED

**TITLE**

DPOSBOW - A PROGRAM FOR GENERATING A BALANCE-ON-A-WAVE PROFILE FROM A  
BODYPLAN FOR THE GENERATION OF SHIP HULL HYDROSTATIC PRESSURE LOAD \ (USER

**System Number:****Patron Number:****Requester:****Notes:****DSIS Use only:****Deliver to:** FF





**National Defence  
Research and  
Development Branch**

**Défense nationale  
Bureau de recherche  
et développement**

**DREA CR/95/502**

**DPOSBOW — A Program for Generating a  
Balance-on-a-Wave Profile from a  
Bodyplan for the Generation of Ship Hull  
Hydrostatic Pressure Load  
(User's Manual)**

by

**D.R. Smith**

**D.R. Smith**

**Suite 707, 5959 Spring Garden Road  
Halifax, Nova Scotia, Canada  
B3H 1Y5**

**CONTRACTOR REPORT**

Prepared for

**Defence  
Research  
Establishment  
Atlantic**



**Centre de  
Recherches pour la  
Défense  
Atlantique**

**Canada**



THE CONTENTS OF THE REPORT ARE THE RESPONSIBILITY OF THE CONTRACTOR, AND DO NOT NECESSARILY REFLECT THE OFFICIAL POLICIES OF THE DEPARTMENT OF NATIONAL DEFENCE.

PLEASE DIRECT ENQUIRIES TO:

THE CHIEF,  
DEFENCE RESEARCH ESTABLISHMENT ATLANTIC,  
P.O. BOX 1012,  
DARTMOUTH, NOVA SCOTIA, CANADA  
B2Y 3Z7





**National Defence**  
Research and  
Development Branch

**Défense nationale**  
Bureau de recherche  
et développement

**DREA CR/95/502**

**DPOSBOW — A Program for Generating a  
Balance-on-a-Wave Profile from a  
Bodyplan for the Generation of Ship Hull  
Hydrostatic Pressure Load  
(User's Manual)**

by  
D.R. Smith

D.R. Smith  
Suite 707, 5959 Spring Garden Road  
Halifax, Nova Scotia, Canada  
B3H 1Y5

Scientific Authority

  
Layton E. Gilroy

September 1995

W7707-5-3292/01-HAL  
Contract Number

**CONTRACTOR REPORT**

Prepared for

**Defence  
Research  
Establishment  
Atlantic**



**Centre de  
Recherches pour la  
Défense  
Atlantique**

**Canada**





## Abstract

DPOSBOW is an interactive version of the program POSBOW which has been developed for generating a static wave profile from a ship hull bodyplan. The wave profile is produced as a file which can be accessed by the ship hull finite element modelling program SHPHUL. The wave profile data is used by SHPHUL to generate a hull pressure load in the format of the finite element program VAST.

## Résumé

DPOSBOW est une version interactive du program POSBOW qui a été mise au point pour générer un profil de vague stationnaire à partir du plan transversal de la carène d'un navire. Le profil de vague est fourni sous la forme d'un fichier qui peut être utilisé par SHPHUL, un programme de modélisation par éléments finis de la carène d'un navire. La donnée de ce profil de vague permet à SHPHUL de déduire les efforts de pression sur la carène, lesquels peuvent alors être utilisés par le programme éléments finis VAST.



## Contents

<b>Abstract</b>	<b>iii</b>
<b>Table of Contents</b>	<b>v</b>
<b>List of Figures</b>	<b>vi</b>
<b>1 Introduction</b>	<b>1</b>
<b>2 Bodyplan Files</b>	<b>1</b>
2.1 Bodyplan File in SHPHUL Format . . . . .	1
2.2 Bodyplan File in POSBOW Format . . . . .	1
<b>3 Interactive Terminal Session</b>	<b>2</b>
3.1 Session Using SHPHUL Format . . . . .	2
3.2 Session Using POSBOW Format . . . . .	6
<b>4 Concluding Remarks</b>	<b>8</b>
<b>Appendices</b>	<b>13</b>
<b>A Bodyplan File In SHPHUL Format</b>	<b>13</b>
<b>B Input for Bodyplan File in POSBOW Format</b>	<b>16</b>
<b>C Bodyplan File in POSBOW Format</b>	<b>18</b>
<b>D Wave Profile Data File PROFL.DAT</b>	<b>29</b>
<b>E Running DPOSBOW</b>	<b>30</b>
<b>References</b>	<b>31</b>

List of Figures

1	The Wave Profile Generated by POSBOW for the Hogging Condition . . . . .	9
2	A Graph of the Wave Profile Plotted from PROFL.DAT . . . . .	10
3	The Wave Profile Generated by POSBOW for the Sagging Condition . . . . .	11
4	A Graph of the Wave Profile Plotted from PROFL.DAT with Input in the Form PREFX.DIN . . . . .	12

## 1 Introduction

This report describes the program DPOSBOW which is a modified version of the program POSBOW[1]. This version of POSBOW is used to obtain a waterline for a ship hull when it is balanced on a wave in either a sagging or hogging condition. The program performs the classical static wave balance with the ship poised on a standard trochoidal wave with a length equal to the ship length. The program is interactive and will read a bodyplan file in the format required by the finite element hull modelling program SHPHUL[3] or in the form required by POSBOW.

Once the waterline is generated, it can be used to obtain hydrostatic pressures on the ship hull in a form appropriate for a finite element structural analysis by the finite element program VAST[2]. The pressures are generated through the use of the program SHPHUL and the DPOSBOW-generated file PROFL.DAT.

## 2 Bodyplan Files

The bodyplan file can be in one of two data formats. One is the bodyplan format as shown in Appendix A which is the format used in SHPHUL. The other is in the format shown in Appendix B and Appendix C which is the format of the original POSBOW.

### 2.1 Bodyplan File in SHPHUL Format

The file must be the original unmodified data consisting of a title on one line and the overall length on the second line followed by 21 stations. Less than 21 stations can be used but not more than 21. It is important that the units be identified and located on the line giving the overall length. They must be in the abbreviated form (in.,ft., mm.,or MM.,M. ) and consist of a space and three characters. The first station must start at 1 as shown in the example in Appendix A. The file is identified as PREFX.DAT where PREFX is a five character name given by the user. DPOSBOW will automatically produce a bodyplan file from the data in POSBOW format as PREFX.DIN in addition to the wave profile file PROFL.DAT. An example of PROFL.DAT is shown in Appendix D.

### 2.2 Bodyplan File in POSBOW Format

The data file must be created in accordance with the users guide illustrated in Appendix B. The file in POSBOW format consists of a title line followed by two integers for units identification and printing options. The data must be in either feet or meters. A 1 indicates meters and a 2 indicates feet. The third line gives the overall hull form particulars of length, centre of gravity location, displacement, and draft. The remaining lines of data are the hull lines of form offsets until the last line, which indicates whether sagging or hogging is the condition applied. The

last line also defines wave height control and and phase angle. The input file name must made up of a five character prefix with .DIN as its suffix.

### 3 Interactive Terminal Session

The loading command for running DPOSBOW on a VAX VMS system is given in Appendix E. The additional data required for generating the waterline coordinates are entered in response to terminal prompts. This procedure is demonstrated in the following terminal sessions.

#### 3.1 Session Using SHPHUL Format

This terminal session used a bodyplan file CPFBA.DAT in SHPHUL data format with only 20 stations. The offsets were in millimeters. The program was designed for use with Tektronix terminals or those capable of Tektronix emulation. The prompts are shown as they would appear on the terminal screen.

```
RUN DPOSBOW
```

```
WHAT IS THE LINE SPEED?
```

```
9600
```

```
IDENTIFY TERMINAL TYPE ACCORDING TO RESOLUTION,  
CURSOR AND COLOUR CAPABILITY:
```

```
ENTER 0 FOR TEKTRONIX 4006 (LOW RES/NO CURS/NO COL)
```

```
1 FOR TEKTRONIX 4010/12/13 (LOW RES/CURSORS/NO COL)
```

```
2 FOR TEKTRONIX 4014/4015 (HI RES/CURSORS/NO COL)
```

```
3 FOR TEKTRONIX 41XX/42XX OR 4014/4015-EGM (COLOUR)
```

```
1
```

```
IDENTIFY TERMINAL TYPE ACCORDING TO DIALOG CAPABILITY:
```

```
ENTER 0 NO DIALOG AREA
```

```
1 DIALOG AREA
```

```
0
```

```
CHOOSE THE BODYPLAN FILE FORMAT AVAILABLE
```

```
0 = BODYPLAN FORMAT
```

```
1 = POSBOW DATA FORMAT
```

```
0
```

ENTER THE PREFIX OF THE BODYPLAN FILE NAME
CPFBA

The data file is CPFBA.DAT. Only the first five characters must be entered.

SHIP NAME  
CPF - OFFSETS IN MILLIMETERS TO DECK LINE

The title of the data is displayed for reference.

DISTANCE BETWEEN PERPENDICULARS 124500.00 mm. ENTER 0 TO CONTINUE 1 TO STOP
0

The length and units used are displayed for confirmation.

ENTER CG DISTANCE FROM BOW IN METERS
62

The centre of gravity must always be entered in meters or feet, depending on whether SI or FPS units are used, regardless of the units given for the length.

ENTER DISPLACEMENT IN LONG TONS OR TONNES
2000

ENTER DRAFT IN METERS
4

ENTER THE LOADING CONDITION 1 = SAGGING 2 = HOGGING
2

WAVE HEIGHT SELECTED= 6.695 METERS ENTER 0 TO CONTINUE 1 TO CHANGE WAVE HEIGHT
0

Here the units must be in feet or meters depending on whether FPS or SI units are used.

UNITS FOR THE WAVE PROFILE ARE - MILLIMETERS- DO YOU WISH TO CHANGE THEM ? 0 = YES 1 = NO
1



BALANCE ON A WAVE LOADING  ENTER 0 = TO CONTINUE 1 = PLOT GENERATED WAVE PROFILE FROM PROFL.DAT
1

WAVE HEIGHT DATA IN MILLIMETERS ENTER 0 TO CONTINUE S TO STOP
0

The plot of the wave profile generated is shown in Figure 1.

PLOT WAVE AS A GRAPH 0 = YES 1 = NO
0

The wave profile is plotted as a graph in Figure 2 from the data in the file PROFL.DAT.

**OUTPUT FILES**

PROFL.DAT = WATER LINE OFFSETS IN SHPHUL FORMAT  
POSBOW.OUT = BONJEAN, PRESSURE AND WAVE DATA  
CPFBA.DIN = BODYPLAN FILE CREATED IN POSBOW FORMAT  
ENTER 0 TO STOP

0

The output files produced are listed. If the bodyplan data is in SHPHUL format then a bodyplan file in POSBOW format is also created so that the unmodified version of POSBOW can be run to obtain hull pressure data in the original form set by the program. A file POSBOW.OUT is also created as a check of the computations.

**3.2 Session Using POSBOW Format**

This terminal session used a bodyplan file 265ft.DIN in POSBOW format. The offsets were in feet and the condition was sagging.

CHOOSE THE BODYPLAN FILE FORMAT AVAILABLE

0 = BODYPLAN FORMAT  
1 = POSBOW DATA FORMAT

0

ENTER THE PREFIX OF THE BODYPLAN FILE NAME

265FT

Name of input file ==> 265FT.DIN  Is it ready? [Y/N]
Y

When the data is supplied in POSBOW format the file name is displayed for confirmation.

Computing...Enter 0 to continue .
0

UNITS FOR THE WAVE PROFILE ARE - FEET - DO YOU WISH TO CHANGE THEM ? 0 = YES 1 = NO
1

In this case the units must be entered in feet.

BALANCE ON A WAVE LOADING  ENTER 0 = TO CONTINUE 1 = PLOT GENERATED WAVE PROFILE FROM PROFL.DAT
1

It is not necessary to plot the wave profile data, except for confirmation, as the PROFL.DAT file will be created in any case.

WAVE HEIGHT DATA IN FEET ENTER 0 TO CONTINUE S TO STOP
0

The plot of the wave profile generated is shown in Figure 3.

PLOT WAVE AS A GRAPH 0 = YES 1 = NO
0

The wave profile is plotted as a graph in Figure 4 from the data in the file PROFL.DAT from input data in the format PREFX.DIN.

#### 4 Concluding Remarks

The program DPOSBOW has been described and demonstrated by interactive terminal sessions. The program was shown to be capable of generating a data file of a static wave profile for a ship hull in the sagging or hogging condition for a specified wave height. The file can be used by the program SHPHUL to generate a hull pressure load, in the format of the finite element program VAST, to carry-out a structural analysis.



Figure 1: The Wave Profile Generated by POSBOW for the Hogging Condition

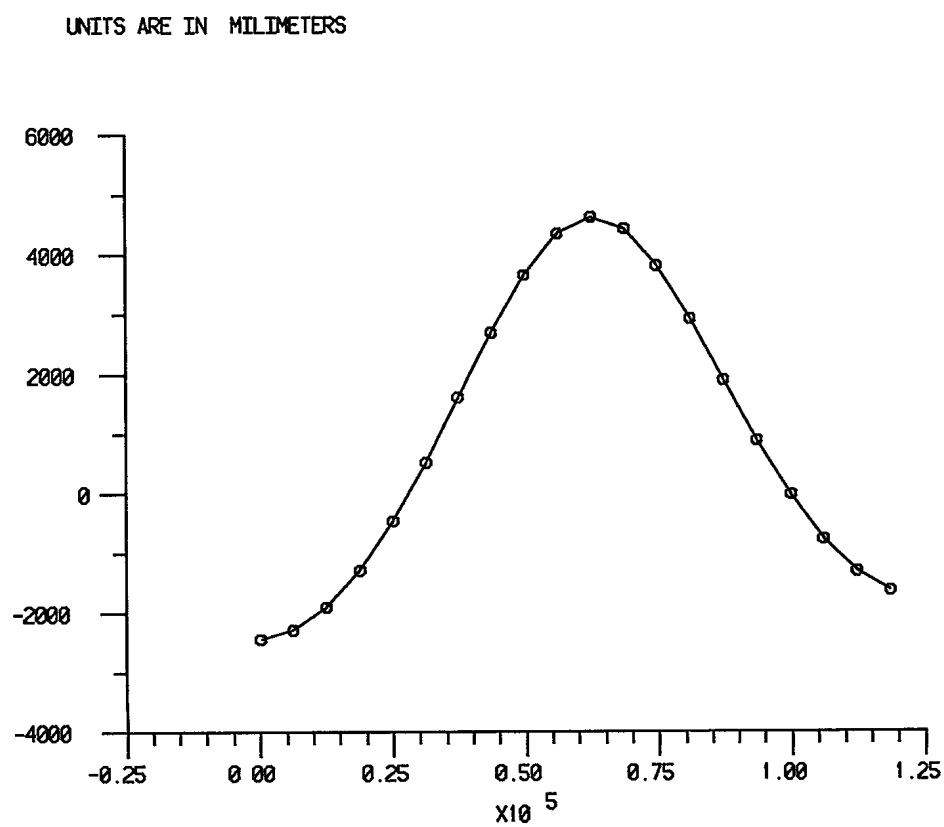


Figure 2: A Graph of the Wave Profile Plotted from PROFL.DAT



Figure 3: The Wave Profile Generated by POSBOW for the Sagging Condition

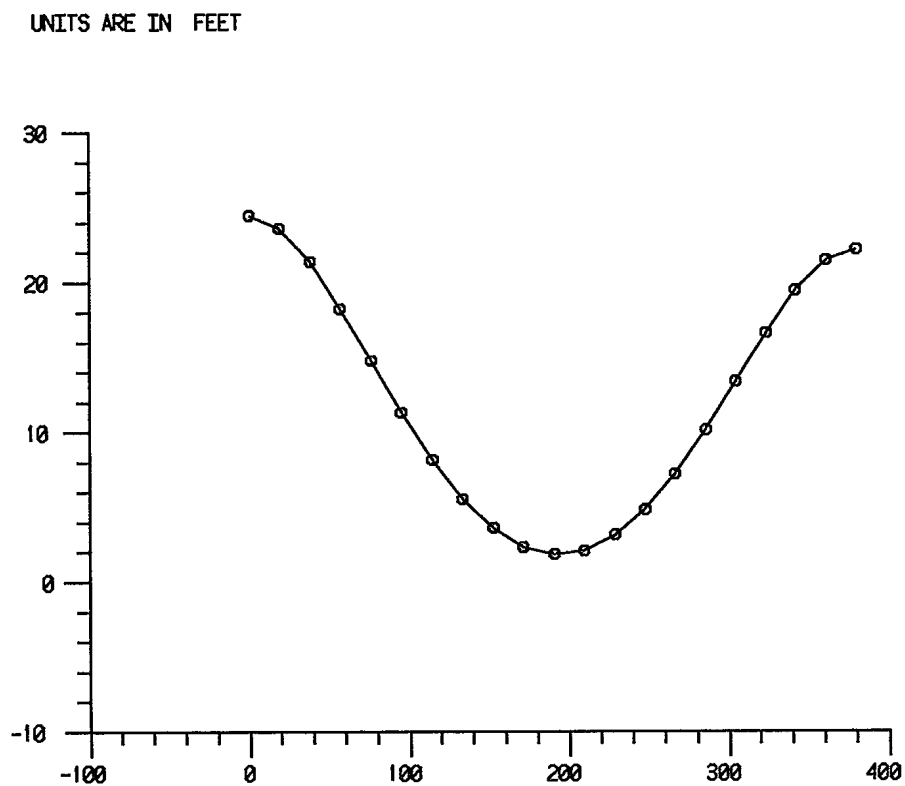


Figure 4: A Graph of the Wave Profile Plotted from PROF.LDAT with Input in the Form PREFX.DIN



## A Bodyplan File In SHPHUL Format

This is a printout of the file CPFBA.DAT.

```

CPF - OFFSETS IN MILLIMETERS TO DECK LINE DEC.7 1993      Title
124500.00 mm. Overall length F10.2 format
  1.00000 15 4      1 = station 15 = number of offsets 4 = unused number
    0.0   292.0   515.0   735.0   974.0  1151.0  1255.0  1586.0  1975.0
2424.0  3000.0  3550.0  4250.0  4913.0  5400.0
  126.0  1000.0  2000.0  3000.0  4000.0  4630.0  5000.0  6000.0  7000.0
8000.0  9000.0 10000.0 11000.0 12015.0 12650.0
  2.00000 17 5
    0.0   200.0   721.0  1000.0  1166.0  1552.0  1930.0  2188.0  2334.0
2774.0  3256.0  3785.0  4350.0  5100.0  5700.0  6360.0  6600.0
    0.0    0.0   1000.0  1608.0  2000.0  3000.0  4000.0  4630.0  5000.0
6000.0  7000.0  8000.0  9000.0 10000.0 11000.0 12000.0 12500.0
  3.00000 18 6
    0.0   200.0  1000.0  1160.0  1837.0  2390.0  2913.0  3239.0  3426.0
3932.0  4437.0  4984.0  5650.0  6200.0  6300.0  6800.0  7300.0  7400.0
    0.0    0.0   800.0  1000.0  2000.0  3000.0  4000.0  4630.0  5000.0
6000.0  7000.0  8000.0  9000.0  9750.0 10000.0 11000.0 12000.0 12200.0
  4.00000 18 7
    0.0   200.0  1665.0  2000.0  2588.0  3306.0  3916.0  4255.0  4446.0
4930.0  5404.0  5926.0  6300.0  6500.0  6800.0  7029.4  7392.3  7726.0
    0.0    0.0  1000.0  1324.0  2000.0  3000.0  4000.0  4630.0  5000.0
6000.0  7000.0  8000.0  8700.0  9000.0  9400.0 10023.4 11002.3 11926.0
  5.00000 18 8
    0.0   200.0  1000.0  2268.0  3470.0  4273.0  4869.0  5167.0  5330.0
5731.0  6137.0  6594.0  6929.0  7200.0  7300.0  7450.0  7750.0  7900.0
    0.0    0.0   303.0  1000.0  2000.0  3000.0  4000.0  4630.0  5000.0
6000.0  7000.0  8000.0  8615.0  9000.0  9420.0 10000.0 11000.0 11650.0
  6.00000 18 9
    0.0   200.0  2000.0  2971.0  4373.0  5204.0  5702.0  5930.0  6057.0
6365.0  6688.0  7047.0  7308.0  7473.0  7535.0  7724.0  7908.0  7999.0
    0.0    0.0   534.0  1000.0  2000.0  3000.0  4000.0  4630.0  5000.0
6000.0  7000.0  8000.0  8503.0  8803.0  9104.0 10005.0 10982.0 11450.0
  7.00000 18 10
    0.0   200.0  2000.0  3731.0  5190.0  5979.0  6360.0  6528.0  6622.0
6856.0  7101.0  7364.0  7554.0  7718.0  7781.0  7926.0  8125.0  8153.0
    0.0    0.0   364.0  1000.0  2000.0  3000.0  4000.0  4630.0  5000.0
6000.0  7000.0  8000.0  8521.0  8822.0  9160.0 10005.0 11000.0 11264.0
  8.00000 18 11
    0.0   200.0  2000.0  4340.0  5754.0  6493.0  6812.0  6946.0  7020.0
7208.0  7396.0  7584.0  7800.0  7820.0  7813.0  8021.0  8192.0  8200.0
    0.0    0.0   338.0  1000.0  2000.0  3000.0  4000.0  4630.0  5000.0
6000.0  7000.0  8000.0  8700.0  8800.0  8972.0  9986.0 11019.0 11132.0
  9.00000 15 12
    0.0   200.0  2000.0  4724.0  6122.0  6814.0  7104.0  7210.0  7267.0

```

7417.0	7567.0	7717.0	7800.0	7850.0	8200.0			
0.0	0.0	338.0	1000.0	2000.0	3000.0	4000.0	4630.0	5000.0
6000.0	7000.0	8000.0	8700.0	9000.0	11132.0			
10.00000	15	13						
0.0	200.0	2000.0	4895.0	6348.0	6989.0	7258.0	7345.0	7389.0
7528.0	7658.0	7788.0	7850.0	7889.0	8200.0			
0.0	0.0	338.0	1000.0	2000.0	3000.0	4000.0	4630.0	5000.0
6000.0	7000.0	8000.0	8700.0	9010.0	11151.0			
11.00000	15	14						
0.0	200.0	2000.0	4940.0	6416.0	7043.0	7312.0	7400.0	7446.0
7569.0	7693.0	7816.0	7830.0	7850.0	8200.0			
0.0	0.0	338.0	1000.0	2000.0	3000.0	4000.0	4630.0	5000.0
6000.0	7000.0	8000.0	8700.0	9000.0	11150.0			
12.00000	15	15						
0.0	200.0	2000.0	4824.0	6348.0	7006.0	7300.0	7400.0	7446.0
7569.0	7693.0	7816.0	7830.0	7850.0	8191.0			
0.0	0.0	338.0	1000.0	2000.0	3000.0	4000.0	4630.0	5000.0
6000.0	7000.0	8000.0	8700.0	9000.0	11151.0			
13.00000	14	16						
0.0	200.0	2000.0	4433.0	6181.0	6895.0	7225.0	7335.0	7390.0
7519.0	7647.0	7776.0	7810.0	8135.0				
0.0	0.0	358.0	1000.0	2000.0	3000.0	4000.0	4630.0	5000.0
6000.0	7000.0	8000.0	8700.0	11192.3				
14.00000	14	17						
0.0	200.0	2000.0	3437.0	5777.0	6673.0	7060.0	7190.0	7260.0
7397.0	7533.0	7669.0	7775.0	8078.0				
0.0	0.0	647.0	1000.0	2000.0	3000.0	4000.0	4630.0	5000.0
6000.0	7000.0	8000.0	8690.0	11192.3				
15.00000	14	18						
0.0	200.0	1183.0	2000.0	4787.0	6183.0	6780.0	6971.0	7063.0
7221.0	7364.0	7508.0	7642.0	8000.0				
0.0	0.0	1000.0	1281.0	2000.0	3000.0	4000.0	4630.0	5000.0
6000.0	7000.0	8000.0	8690.0	11200.0				
16.00000	15	19						
0.0	341.0	1000.0	2000.0	3000.0	4000.0	5000.0	6000.0	6677.0
6811.0	7012.0	7161.0	7309.0	7396.0	7800.0			
517.0	1000.0	1682.0	2075.0	2260.0	2500.0	2803.0	3494.0	4630.0
5000.0	6000.0	7000.0	8000.0	8690.0	11250.0			
17.00000	15	20						
0.0	1000.0	2000.0	3000.0	4000.0	5214.7	5600.0	5892.0	6338.0
6512.0	6757.0	6911.0	7065.0	7150.0	7550.0			
1880.0	2453.0	2750.0	2944.0	3152.0	3549.3	3700.0	4000.0	4630.0
5000.0	6000.0	7000.0	8000.0	8700.0	11270.0			
18.00000	14	21						
0.0	1000.0	2000.0	3000.0	4246.9	4558.0	5353.0	5955.0	6177.0
6460.0	6618.0	6776.0	6900.0	7330.0				
2970.0	3153.0	3318.0	3488.0	3738.2	3806.9	4116.0	4630.0	5000.0
6000.0	7000.0	8000.0	8700.0	11280.0				
19.00000	13	22						

0.0	1000.0	2000.0	3000.0	4000.0	5000.0	5516.0	5807.0	6125.0
6286.0	6469.0	6507.0	6900.0					
3670.0	3739.0	3811.0	3894.0	4020.0	4286.0	4630.0	5000.0	6000.0
7000.0	7995.0	8127.0	10701.9					
20.00000	8	23						
0.0	3000.0	4000.0	5000.0	5550.0	5800.0	6100.0	6500.0	
4080.0	4200.0	4300.0	4550.0	5200.0	6000.0	8125.0	10700.0	

## B Input for Bodyplan File in POSBOW Format

The input file in POSBOW is identified as PREFX.DIN  
 An example of the file PREFX.DIN is given in Appendix C

### Data set 1

TITLE - Up to 64 characters identifying ship and date

### Data set 2 FREE FORMAT(2 integers)

IUNIT - specifies the system of units to be used for input  
 and output:  
 IUNIT = 1 SI units  
 IUNIT = 2 FPS units

IPR - control integer for Bonjean data printout  
 IPR = 0 Bonjean output suppressed  
 IPR = 1 Bonjean output printed

### Data set 3 FREE FORMAT(4 reals)

EL - Length between perpendiculars  
 ELCG - Longitudinal position centre of gravity from FP  
 TONS - Displacement of the ship  
 DRFT - Mean draft of the ship

### Data set 4 FREE FORMAT(2 integers)

#### Part a: (one card)

IST - Station no. (from sta 0 to sta 20)  
 NPTS(IST)- Number of offsets for the ith section (less than 25)

#### Part b: (a total of NPTS(IST) cards for ith section)

FREE FORMAT(2 reals)

X(J) - Global X-coordinate of the jth offset point of the  
 ith section  
 Y(J) - Global Y- coordinate of the jth offset point of the  
 ith section

### Data set 5 FREE FORMAT(2 integers 1 real)

LDTYP - Types of loading to be calculated  
 LDTYP=1 Sagging condition  
 LDTYP=2 Hogging condition  
 IWH - control integer for wave height

```
WH=1      wave height = LBP/20
WH=2      wave height = LBP/13.724
WH=3      wave height = 0.6(LBP)**0.6
WH=4      wave height = 1.1(LBP)**0.5
WH=5      wave height = 5.0(LBP)**0.3
WH=9      wave height = 0.6(LBP)**0.5
PHASE    - Phase angle
```

## C Bodyplan File in POSBOW Format

The file is identified by a five character prefix as 265FT.DIN.

### 265 HULL OFFSETS

2 0 FEET

380.00 190.00 2000.00 4.00 Length, C.G., Displacement, Draft

0 29

0.40 0.00

0.90 1.20

1.10 2.30

1.30 3.50

1.50 4.70

1.70 5.90

1.90 7.00

2.00 8.20

2.20 9.40

2.40 10.60

2.70 11.70

2.90 12.90

3.10 14.10

3.40 15.20

3.70 16.40

4.10 17.60

4.50 18.80

4.90 19.90

5.40 21.10

5.90 22.30

6.40 23.40

7.00 24.60

7.60 25.80

8.20 27.00

8.90 28.10

9.60 29.30

10.40 30.50

11.10 31.70

12.00 34.00

1 28

0.00 0.00

1.40 1.20

2.10 2.30

2.70 3.50

3.10 4.70

3.50 5.90

3.80 7.00

4.20 8.20

4.60 9.40

4.90 10.60

5.20	11.70
5.60	12.90
6.10	14.10
6.50	15.20
6.90	16.40
7.40	17.60
7.90	18.80
8.40	19.90
8.90	21.10
9.50	22.30
10.00	23.40
10.60	24.60
11.20	25.80
11.80	27.00
12.50	28.10
13.10	29.30
13.90	30.50
14.70	32.80
2 27	
0.00	0.00
2.00	1.20
3.30	2.30
4.30	3.50
4.90	4.70
5.50	5.90
6.00	7.00
6.50	8.20
7.00	9.40
7.40	10.60
7.90	11.70
8.40	12.90
8.90	14.10
9.40	15.20
9.90	16.40
10.40	17.60
10.80	18.80
11.40	19.90
11.90	21.10
12.40	22.30
13.00	23.40
13.60	24.60
14.20	25.80
14.80	27.00
15.40	28.10
15.90	29.30
16.50	31.50
3 26	
0.00	0.00
3.00	1.20

4.70	2.30
5.80	3.50
6.80	4.70
7.70	5.90
8.40	7.00
9.00	8.20
9.50	9.40
10.00	10.60
10.60	11.70
11.10	12.90
11.60	14.10
12.10	15.20
12.60	16.40
13.10	17.60
13.50	18.80
14.00	19.90
14.50	21.10
15.00	22.30
15.50	23.40
15.90	24.60
16.30	25.80
16.70	27.00
17.10	28.10
17.60	30.50

4 26

0.00	0.00
4.10	1.20
6.20	2.30
7.60	3.50
8.70	4.70
9.80	5.90
10.60	7.00
11.40	8.20
12.00	9.40
12.60	10.60
13.20	11.70
13.70	12.90
14.20	14.10
14.70	15.20
15.20	16.40
15.60	17.60
15.90	18.80
16.30	19.90
16.60	21.10
17.00	22.30
17.30	23.40
17.50	24.60
17.80	25.80
18.10	27.00



18.40	28.10
18.70	29.50
5 25	
0.00	0.00
4.80	1.20
7.90	2.30
9.70	3.50
10.90	4.70
11.90	5.90
12.80	7.00
13.70	8.20
14.50	9.40
15.10	10.60
15.70	11.70
16.10	12.90
16.50	14.10
17.00	15.20
17.40	16.40
17.70	17.60
17.90	18.80
18.10	19.90
18.30	21.10
18.50	22.30
18.70	23.40
18.80	24.60
19.00	25.80
19.20	27.00
19.40	28.40
6 24	
0.00	0.00
5.40	1.20
9.20	2.30
11.40	3.50
12.90	4.70
14.10	5.90
15.10	7.00
15.90	8.20
16.70	9.40
17.30	10.60
17.80	11.70
18.20	12.90
18.50	14.10
18.70	15.20
19.00	16.40
19.10	17.60
19.30	18.80
19.40	19.90
19.60	21.10
19.70	22.30

19.80	23.40
19.90	24.60
19.90	25.80
20.00	27.60
7 24	
0.00	0.00
5.80	1.20
10.20	2.30
12.90	3.50
14.80	4.70
16.10	5.90
17.10	7.00
17.90	8.20
18.40	9.40
18.90	10.60
19.30	11.70
19.60	12.90
19.90	14.10
20.10	15.20
20.10	16.40
20.20	17.60
20.20	18.80
20.30	19.90
20.40	21.10
20.40	22.30
20.50	23.40
20.50	24.60
20.60	25.80
20.60	27.30
8 23	
0.00	0.00
5.90	1.20
10.70	2.30
14.30	3.50
16.40	4.70
17.70	5.90
18.70	7.00
19.40	8.20
19.80	9.40
20.10	10.60
20.30	11.70
20.50	12.90
20.70	14.10
20.80	15.20
20.80	16.40
20.90	17.60
20.90	18.80
20.90	19.90
20.80	21.10

20.80	22.30
20.80	23.40
20.90	24.60
20.90	27.00
9 23	
0.00	0.00
6.10	1.20
11.00	2.30
15.10	3.50
17.10	4.70
18.50	5.90
19.40	7.00
19.90	8.20
20.30	9.40
20.60	10.60
20.80	11.70
20.90	12.90
20.90	14.10
21.00	15.20
21.00	16.40
21.00	17.60
21.00	18.80
21.00	19.90
21.00	21.10
20.90	22.30
20.90	23.40
20.90	24.60
20.90	26.60
10 23	
0.00	0.00
6.30	1.20
11.30	2.30
15.30	3.50
17.10	4.70
18.50	5.90
19.30	7.00
19.80	8.20
20.30	9.40
20.60	10.60
20.70	11.70
20.90	12.90
20.90	14.10
21.00	15.20
21.00	16.40
21.00	17.60
21.00	18.80
21.00	19.90
20.90	21.10
20.90	22.30

20.90	23.40
20.90	24.60
20.90	26.50
11 23	
0.00	0.00
6.20	1.20
11.10	2.30
14.60	3.50
16.50	4.70
17.90	5.90
19.00	7.00
19.60	8.20
20.10	9.40
20.40	10.60
20.60	11.70
20.70	12.90
20.80	14.10
20.90	15.20
21.00	16.40
20.90	17.60
20.90	18.80
20.90	19.90
20.90	21.10
20.90	22.30
20.90	23.40
20.90	24.60
20.90	26.50
12 23	
0.00	0.00
5.60	1.20
10.30	2.30
13.60	3.50
15.70	4.70
17.30	5.90
18.50	7.00
19.20	8.20
19.80	9.40
20.10	10.60
20.40	11.70
20.50	12.90
20.70	14.10
20.80	15.20
20.90	16.40
20.90	17.60
20.90	18.80
20.90	19.90
20.90	21.10
20.90	22.30
20.90	23.40

	20.90	24.60
	20.90	26.50
13	23	
	0.00	0.00
	4.70	1.20
	8.80	2.30
	12.60	3.50
	14.90	4.70
	16.60	5.90
	17.80	7.00
	18.70	8.20
	19.30	9.40
	19.80	10.60
	20.10	11.70
	20.40	12.90
	20.60	14.10
	20.70	15.20
	20.80	16.40
	20.80	17.60
	20.80	18.80
	20.90	19.90
	20.90	21.10
	20.90	22.30
	20.90	23.40
	20.90	24.60
	20.90	26.50
14	23	
	0.00	0.30
	3.60	1.20
	7.50	2.30
	11.00	3.50
	13.30	4.70
	15.30	5.90
	16.90	7.00
	18.00	8.20
	18.70	9.40
	19.30	10.60
	19.70	11.70
	20.00	12.90
	20.30	14.10
	20.40	15.20
	20.60	16.40
	20.70	17.60
	20.70	18.80
	20.70	19.90
	20.70	21.10
	20.70	22.30
	20.70	23.40
	20.70	24.60

	20.70	26.50
15	22	
	0.00	1.30
	5.20	2.30
	7.70	3.50
	11.00	4.70
	13.50	5.90
	15.50	7.00
	16.80	8.20
	17.80	9.40
	18.50	10.60
	18.90	11.70
	19.30	12.90
	19.60	14.10
	19.90	15.20
	20.20	16.40
	20.40	17.60
	20.40	18.80
	20.40	19.90
	20.40	21.10
	20.40	22.30
	20.40	23.40
	20.40	24.60
	20.40	26.50
16	21	
	0.00	3.20
	3.70	3.50
	7.70	4.70
	9.80	5.90
	12.60	7.00
	14.80	8.20
	16.20	9.40
	17.20	10.60
	17.80	11.70
	18.20	12.90
	18.60	14.10
	19.00	15.20
	19.20	16.40
	19.30	17.60
	19.40	18.80
	19.50	19.90
	19.50	21.10
	19.60	22.30
	19.60	23.40
	19.60	24.60
	19.60	26.50
17	19	
	0.00	5.80
	2.70	5.90

7.40	7.00
11.60	8.20
13.50	9.40
15.10	10.60
16.10	11.70
16.80	12.90
17.20	14.10
17.60	15.20
18.00	16.40
18.20	17.60
18.30	18.80
18.40	19.90
18.40	21.10
18.50	22.30
18.60	23.40
18.60	24.60
18.70	26.50
18 16	
0.00	8.80
6.10	9.40
12.00	10.60
13.60	11.70
14.70	12.90
15.30	14.10
15.80	15.20
16.20	16.40
16.40	17.60
16.60	18.80
16.70	19.90
16.90	21.10
17.00	22.30
17.20	23.40
17.30	24.60
17.40	26.50
19 14	
0.00	10.80
10.70	11.70
12.00	12.90
12.70	14.10
13.40	15.20
13.80	16.40
14.10	17.60
14.40	18.80
14.60	19.90
14.90	21.10
15.10	22.30
15.40	23.40
15.60	24.60
15.90	26.50

20	14	
	0.00	10.70
	7.80	11.70
	9.20	12.90
	9.80	14.10
	10.40	15.20
	10.90	16.40
	11.30	17.60
	11.70	18.80
	12.00	19.90
	12.40	21.10
	12.70	22.30
	13.10	23.40
	13.50	24.60
	13.90	26.50
2	4	0.0



## D Wave Profile Data File PROFL.DAT

\*\*\*\*\* SHIPS BALANCING \*\*\*\*\*

WAVE HEIGHT DATA IN MILLIMETERS			
Y	Y	Z	
SAGGING	HOGGING	DIST FROM FP	STA
0.000	-2451.077	0.000	1
0.000	-2293.680	6225.000	2
0.000	-1898.940	12450.000	3
0.000	-1279.184	18675.000	4
0.000	-457.909	24900.000	5
0.000	525.298	31125.000	6
0.000	1607.657	37350.000	7
0.000	2694.858	43575.000	8
0.000	3657.025	49800.000	9
0.000	4340.907	56025.000	10
0.000	4611.848	62250.000	11
0.000	4414.537	68475.000	12
0.000	3804.285	74700.000	13
0.000	2915.749	80925.000	14
0.000	1902.177	87150.000	15
0.000	893.448	93375.000	16
0.000	-16.129	99600.000	17
0.000	-763.774	105825.000	18
0.000	-1309.900	112050.000	19
0.000	-1631.009	118275.000	20

%- - - - - INPUT DATA - - - - -

INPUT FILE: CPFBA.DAT

TITLE: CPF - OFFSETS IN MILIMETERS TO DECK LINE DEC.7 1993 (D.R. SMITH)

### 1) HULL PARAMETERS

LENGTH	124.50 (M)
DRAFT	4.00 (M)
DISPLACEMENT	2000.00 (TONNES)
LONGITUDINAL POSITON OF CG (LCG)	62.00 (M)
NO. OF STATIONS	20

### 2) TROCHOIDAL WAVE

WAVE LENGTH = LBP

## E Running DPOSBOW

The loading command for DPOSBOW on a VAX VMS system is:

```
$FOR/NOOPT DPOSBOW.DRS/CHECK  
$LINK POSBOW,PS_9:[SOURCE.LIB.V60]PLOTVX,PLOTV,MARLIB,PL4113,-  
DREAGUI,MGRAPH,PS_9:[SOURCE.LIB.OLD]PLOT10/LIB
```

Where PS\_9:[SOURCE.LIB.V60] is the directory containing the following object files.

PLOTVX,PLOTV,MARLIB,PL4113,DREAGUI,MGRAPH - are generic plotting codes compatible with Tektronix PLOT10 and GKS graphics. They were developed by Martec Ltd. Halifax N.S.

Similarly PS\_9:[SOURCE.LIB.OLD] is the directory containing the Tektronix PLOT10 plotting program.

## References

- [1] Ando, S., "POSBOW-FORTRAN Program for Calculating Pressures on Ship Hulls Balanced on Standard Waves," Informal Communication, Defence Research Establishment Atlantic, November, 1983.
- [2] "Vibration And Strength Analysis Program (VAST): User's Manual," Martec Ltd., Halifax, Nova Scotia, September, 1990.
- [3] Smith, D.R., "SHPHUL User's Manual (Version II)," DREA Contractor Report CR/94/443, July, 1994.



**UNCLASSIFIED**SECURITY CLASSIFICATION OF FORM  
(highest classification of Title, Abstract, Keywords)

<b>DOCUMENT CONTROL DATA</b> (Security classification of title, body of abstract and indexing annotation must be entered when the overall document is classified)		
1. <b>ORIGINATOR</b> (the name and address of the organization preparing the document. Organizations for whom the document was prepared, e.g. Establishment sponsoring a contractor's report, or tasking agency, are entered in section 8.) <b>Defence Research Establishment Atlantic P.O. Box 1012, Dartmouth, N.S. B2Y 3Z7</b>		2. <b>SECURITY CLASSIFICATION</b> (overall security classification of the document including special warning terms if applicable).  <b>Unclassified</b>
3. <b>TITLE</b> (the complete document title as indicated on the title page. Its classification should be indicated by the appropriate abbreviation (S,C,R or U) in parentheses after the title). <b>DPOSBOW-A Program for Generating a Balance-on-a-Wave Profile from a Bodyplan for the Generation of a Ship Hull Hydrostatic Pressure Load (USER'S MANUAL).</b>		
4. <b>AUTHORS</b> (Last name, first name, middle initial. If military, show rank, e.g. Doe, Maj. John E.)  <b>D.R. Smith</b>		
5. <b>DATE OF PUBLICATION</b> (month and year of publication of document)  <b>September 1995</b>	6a. <b>NO OF PAGES</b> (total containing information include Annexes, Appendices, etc).  <b>31</b>	6b. <b>NO. OF REFS</b> (total cited in document)  <b>3</b>
7. <b>DESCRIPTIVE NOTES</b> (the category of the document, e.g. technical report, technical note or memorandum. If appropriate, enter the type of report, e.g. interim, progress, summary, annual or final. Give the inclusive dates when a specific reporting period is covered).  <b>DREA Contractor Report</b>		
8. <b>SPONSORING ACTIVITY</b> (the name of the department project office or laboratory sponsoring the research and development. Include the address).  <b>DREA</b>		
9a. <b>PROJECT OR GRANT NO.</b> (if appropriate, the applicable research and development project or grant number under which the document was written. Please specify whether project or grant).  <b>1.g.3</b>	9b. <b>CONTRACT NO.</b> (if appropriate, the applicable number under which the document was written).  <b>W7707-5-3292/01-HAL</b>	
10a. <b>ORIGINATOR'S DOCUMENT NUMBER</b> (the official document number by which the document is identified by the originating activity. This number must be unique to this document).  <b>DREA CR 95/502</b>	10b. <b>OTHER DOCUMENT NOS.</b> (Any other numbers which may be assigned this document either by the originator or by the sponsor).	
11. <b>DOCUMENT AVAILABILITY</b> (any limitations on further dissemination of the document, other than those imposed by security classification)  ( x ) Unlimited distribution ( ) Distribution limited to defence departments and defence contractors; further distribution only as approved ( ) Distribution limited to defence departments and Canadian defence contractors; further distribution only as approved ( ) Distribution limited to government departments and agencies; further distribution only as approved ( ) Distribution limited to defence departments; further distribution only as approved ( ) Other (please specify):		
12. <b>DOCUMENT ANNOUNCEMENT</b> (any limitation to the bibliographic announcement of this document. This will normally correspond to the Document Availability (11). However, where further distribution (beyond the audience specified in 11) is possible, a wider announcement audience may be selected).  <b>Full unlimited</b>		

**UNCLASSIFIED**

SECURITY CLASSIFICATION OF FORM

DCD03 2/06/87-M

**UNCLASSIFIED**

SECURITY CLASSIFICATION OF FORM

13. **ABSTRACT** (a brief and factual summary of the document. It may also appear elsewhere in the body of the document itself. It is highly desirable that the abstract of classified documents be unclassified. Each paragraph of the abstract shall begin with an indication of the security classification of the information in the paragraph (unless the document itself is unclassified) represented as (S), (C), (R), or (U). It is not necessary to include here abstracts in both official languages unless the text is bilingual).

DPOSBOW is an interactive version of the program POSBOW which has been developed for generating a static wave profile from a ship hull bodyplan. The wave profile is produced as a file which can be accessed by the ship hull finite element modelling program SHIPHUL. The wave profile data is used by SHIPHUL to generate a hull pressure load in the format of the finite element program VAST.

14. **KEYWORDS, DESCRIPTORS or IDENTIFIERS** (technically meaningful terms or short phrases that characterize a document and could be helpful in cataloguing the document. They should be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location may also be included. If possible keywords should be selected from a published thesaurus. e.g. Thesaurus of Engineering and Scientific Terms (TEST) and that thesaurus-identified. If it not possible to select indexing terms which are Unclassified, the classification of each should be indicated as with the title).

static wave  
wave profile  
ship  
hull  
bodyplan  
finite elements  
hull pressure

**UNCLASSIFIED**

SECURITY CLASSIFICATION OF FORM

498676